



Terra Power
1-9-322/9, Plot No. 9, 2nd Floor,
Hanuman Nagar, Kushaiguda, ECIL Post,
Hyderabad - 500 062. Telangana, INDIA.


+91 - 40 - 2726 6696
info@terrapower.co.in
www.terrapower.co.in



www.terrapower.co.in



Terrapower LED Lighting

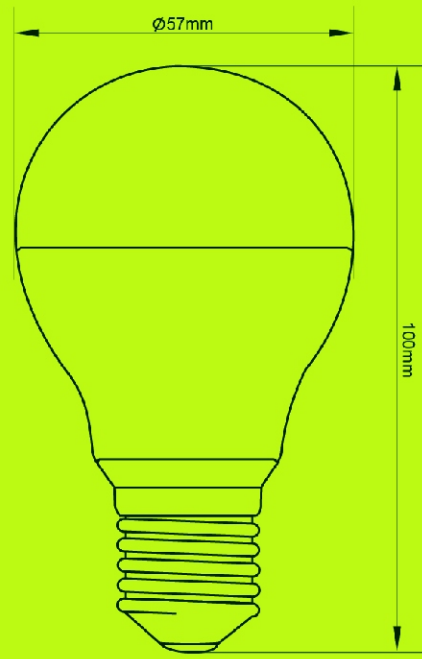

0.5W LED Deco Bulb


- Low energy consumption of 0.5W max.
- Directfit (retrofit) Installation
- Long life up to 10years
- Multipul colour options ■ ■ ■ ■
- Up to 90% energy saving
- Poly carbonate body material
- B22 lamp base
- 75 x 45 mm size
- Bright light

3W/5W Bulb

- Ultra low cost
- Luminous flux >200lm (3W) / >350lm (5W)
- 120° beam angle
- >30,000Hrs life
- WW / CW color temperatures
- 85 x 50mm (3W) / 100 x 60mm (5W)


12W/15W/18W Bulb

- Luminous flux >1050lm (12W) / >1350lm (15W) / >1600lm (18W)
- >0.9 Power factor
- <20% THDi
- >85% efficiency
- >2.5Kv surge protection
- Long life up to 10 years
- Poly carbonate body material
- WW / CW color temperatures

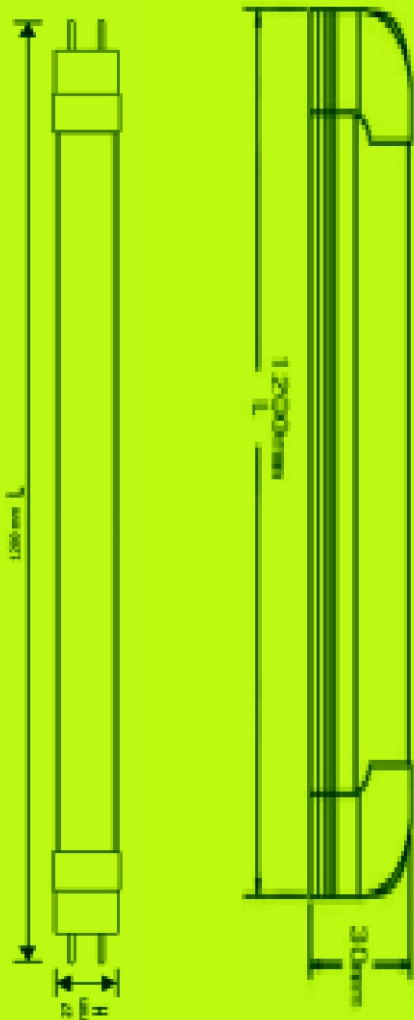


18W Tube light

- Slim T5 LED batten / T8 retrofit
- Wide operating voltage range
- Aluminum / Plastic housing
- Robust driver
- Extruded aluminum heat sink
- No Electric shock, large creepage on pc boards
- Glare free optics
- Easy installation
- Luminous flux >1600lm
- >0.9 Power factor
- <20% THDi
- >85% efficiency
- >2.5Kv surge protection
- Long life up to 10 years
- WW / CW color temperatures

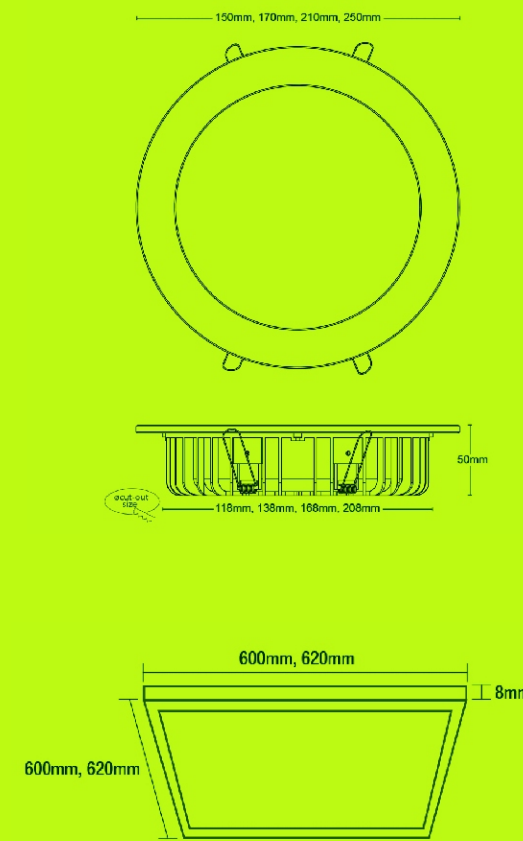

6W/12W/18W Down light


- No Electric shock, isolated driver
- Wide operating voltage range
- Extruded aluminum body
- Robust driver
- Glare free optics
- Easy installation
- Luminous flux >540lm (6W) / >1050lm (12W) / >1600lm (18W)
- >0.9 Power factor
- <15% THDi
- >80% efficiency
- >2.5Kv surge protection
- Long life up to 10 years
- WW / CW color temperatures
- 120 x 120mm (6W) / 150 x 150mm (12W) / 225 x 225mm (18W)

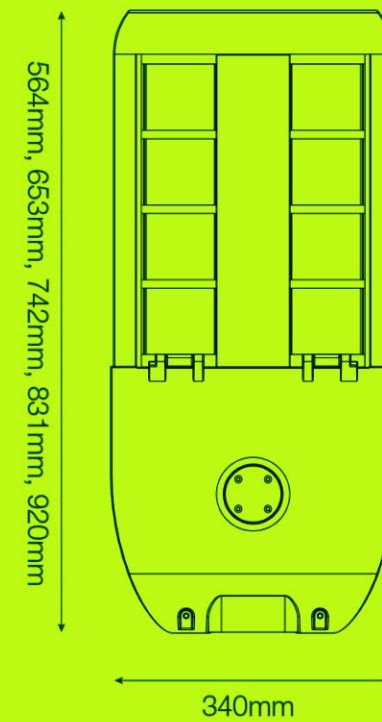

12W/18W/24W/40W/60W Street light

- No Electric shock, isolated driver
- Wide operating voltage range
- Extruded aluminum body
- Robust driver
- Glare free optics
- Easy installation
- >0.9 Power factor
- <10% THDi
- >80% efficiency
- Up to 6Kv surge protection
- Long life up to 10+ years
- WW / CW color temperatures



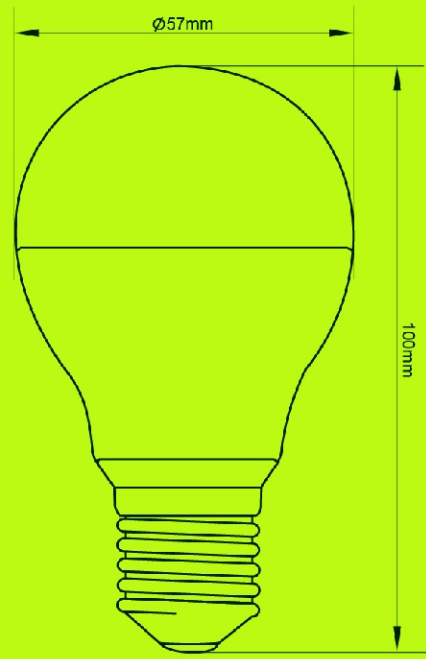

0.5W LED Deco Bulb



- Low energy consumption of 0.5W max.
- Directfit (retrofit) Installation
- Long life up to 10years
- Multipul colour options ■ ■ ■ ■
- Up to 90% energy saving
- Poly carbonate body material
- B22 lamp base
- 75 x 45 mm size
- Bright light

3W/5W Bulb

- Ultra low cost
- Luminous flux >200lm (3W) / >350lm (5W)
- 120° beam angle
- >30,000Hrs life
- WW / CW color temperatures
- 85 x 50mm (3W) / 100 x 60mm (5W)


12W/15W/18W Bulb

- Luminous flux >1050lm (12W) / >1350lm (15W) / >1600lm (18W)
- >0.9 Power factor
- <20% THDi
- >85% efficiency
- >2.5Kv surge protection
- Long life up to 10 years
- Poly carbonate body material
- WW / CW color temperatures

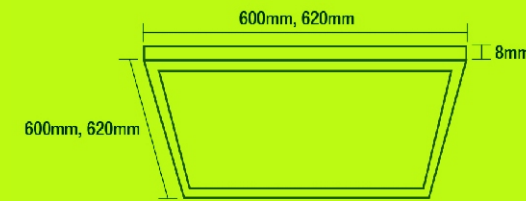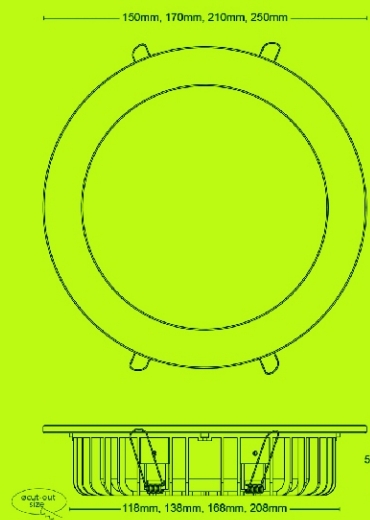


6W/12W/18W Down light

- No Electric shock, isolated driver
- Wide operating voltage range
- Extruded aluminum body
- Robust driver
- Glare free optics
- Easy installation
- Luminous flux >540lm (6W) / >1050lm (12W) / >1600lm (18W)
- >0.9 Power factor
- <15% THDi
- >80% efficiency
- >2.5Kv surge protection
- Long life up to 10 years
- WW / CW color temperatures
- 120 x 120mm (6W) / 150 x 150mm (12W) / 225 x 225mm (18W)

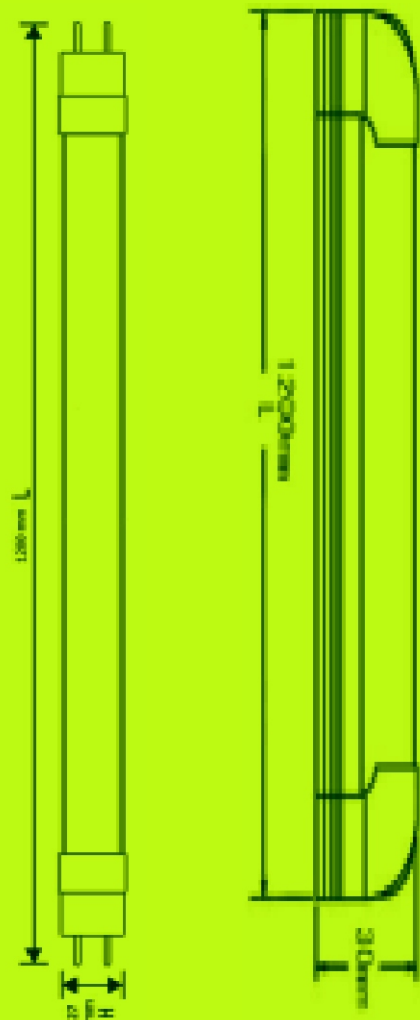

18W Tube light

- Slim T5 LED batten / T8 retrofit
- Wide operating voltage range
- Aluminum / Plastic housing
- Robust driver
- Extruded aluminum heat sink
- No Electric shock, large creepage on pc boards
- Glare free optics
- Easy installation
- Luminous flux >1600lm
- >0.9 Power factor
- <20% THDi
- >85% efficiency
- >2.5Kv surge protection
- Long life up to 10 years
- WW / CW color temperatures

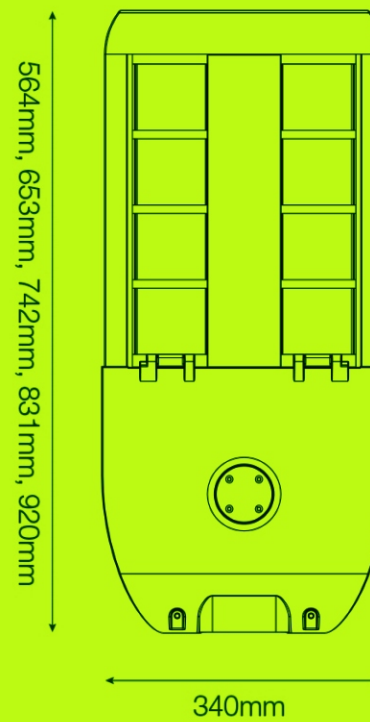

12W/18W/24W/40W/60W Street light

- No Electric shock, isolated driver
- Wide operating voltage range
- Extruded aluminum body
- Robust driver
- Glare free optics
- Easy installation
- >0.9 Power factor
- <10% THDi
- >80% efficiency
- Up to 6Kv surge protection
- Long life up to 10+ years
- WW / CW color temperatures